7010 series
70x70x10 mm

P&Q Curve

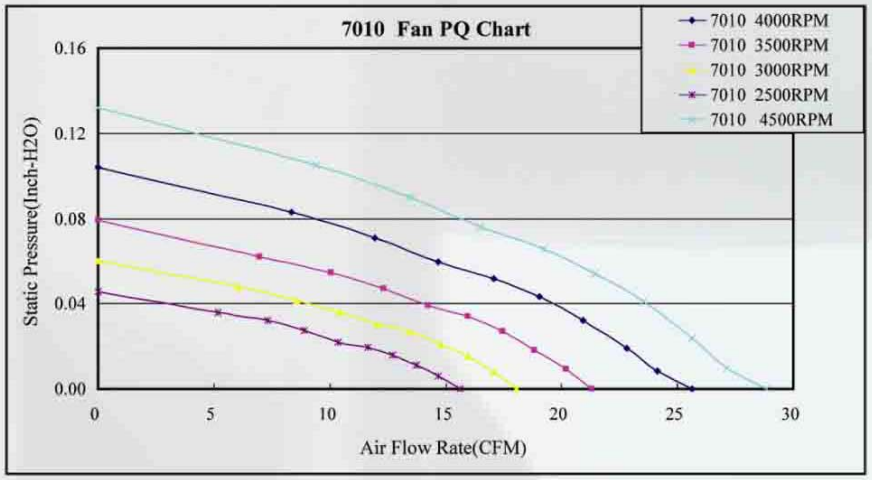

Dimensions Draving

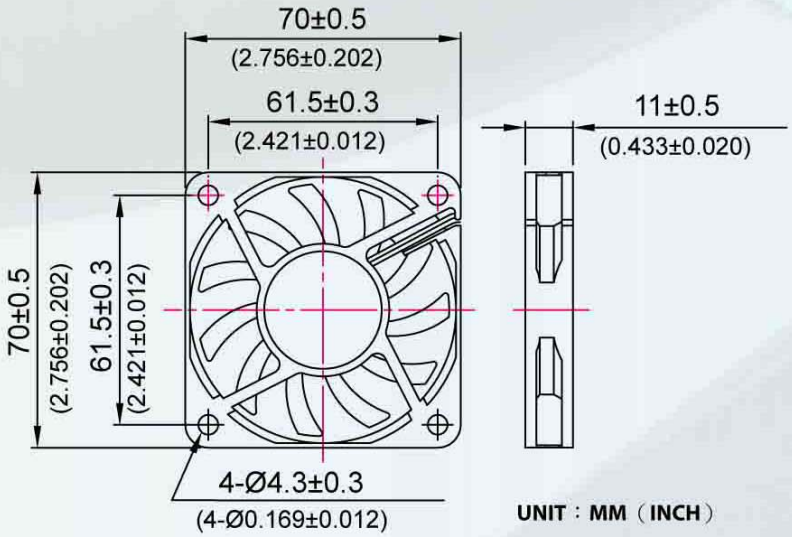

UNIT：MM（INCH）

Specitications

Model	Rated Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	Air Flow (CFM)	Ssatic Pressure (Inch-H2O)	Noise (dBA)
TFD-7010HH12X	12	0.31	3.72	4500	28.83	0.13	<39
TFD-7010H12X	12	0.27	3.24	4000	25.63	0.1	<36
TFD-7010M12X	12	0.25	3	3500	21.33	0.08	<33
TFD-7010L12X	12	0.18	2.16	3000	18.08	0.06	<30
TFD-7010LL12X	12	0.11	1.32	2500	15.62	0.05	<27

- Material：impeller & Frame：Plastic(UL 94V-O)
- Lead Wires：
  UL 1007 AWG#26 Or Equivalent
  Red Wire Positive(+), Black Wire Negative(-), Yellow Wire Or Blue Wire Signal(FG)
- Function type is optional
- The max air flow and the speed are measured in free air; max air pressure is measured at zero air flow
- Noise is measuerd in anechoic chamber in free air, one meter from intake side
- All readings are typical values at rated voltage
- Specifications are subject to change without notice
- Additional special function may be added according the requirement of customer